
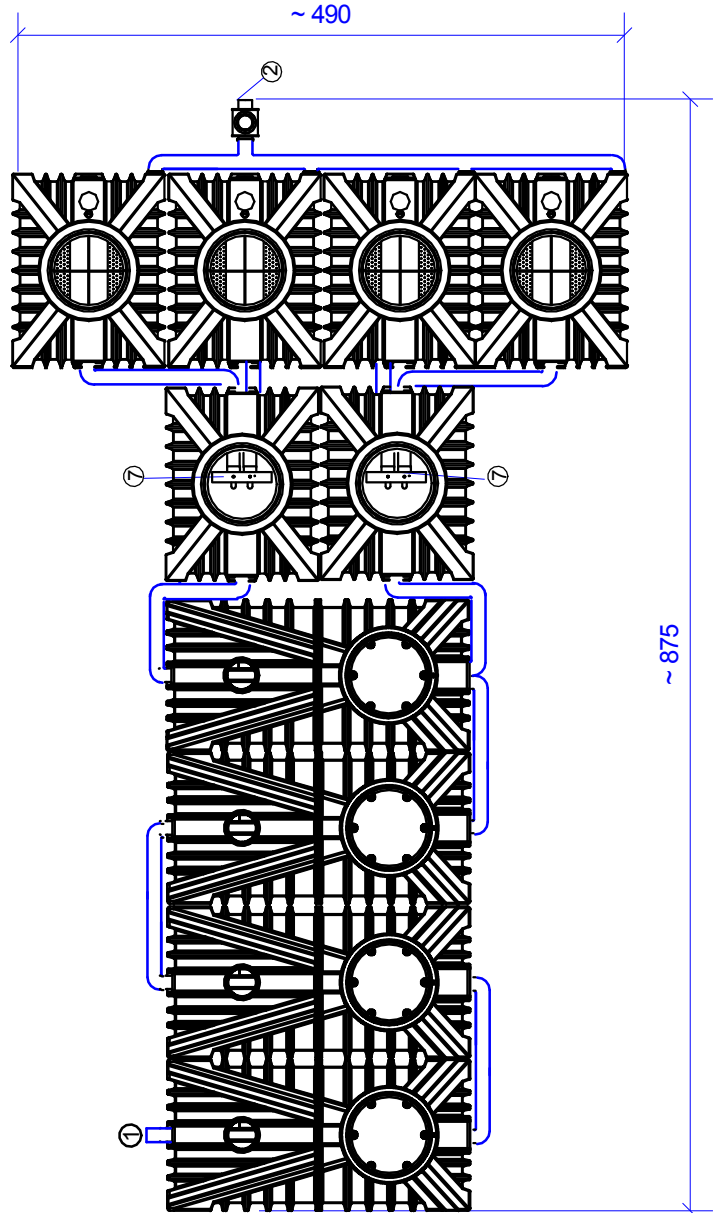


all measurements in cm

All blue marked components are required on site or options.

info@clearfox.com

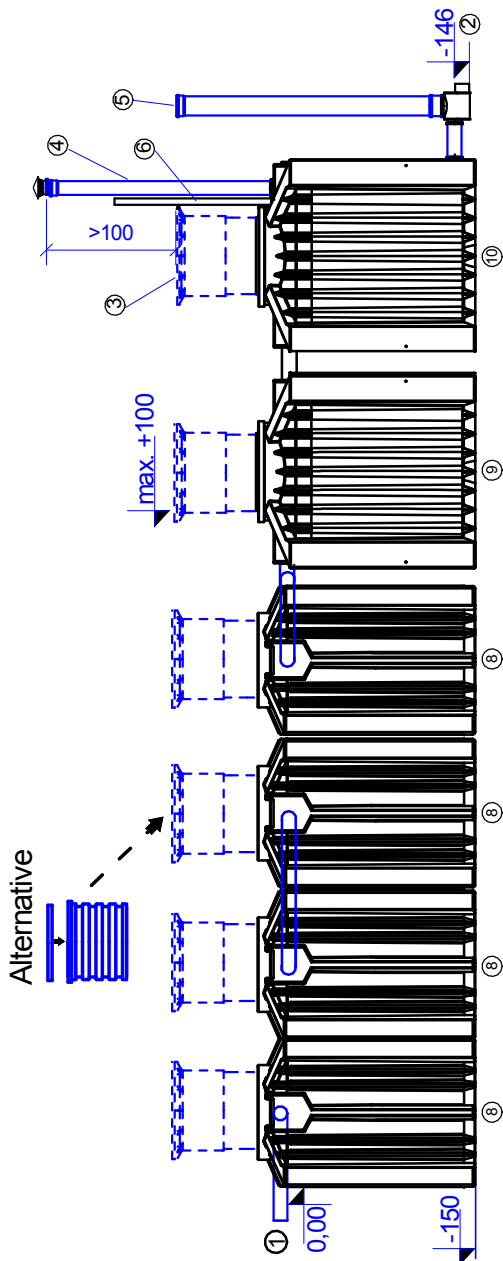

1. Inlet 110mm (Mat. PVC/PE)
2. Outlet gravity 110mm (Mat. PVC/PE)
3. Ventilated lid (Mat. PE)
4. Aeration pipe inlet 110mm (Mat. PVC/PE)
5. Sampling shaft DN 150 (Mat. PVC / PE)
6. Alarm (Indicator for water backflow)

7. 2 x double Restriction valve (must be adjusted to same level!)
8. Buffer/prechamber tank 3500L (Mat. PE)
9. Distribution tank 2250L (Mat. PE)
10. Biological reactor 2250L (Mat. PE)

Note 1:

The plan view of the tank configuration is an example; in compliance with the hydraulic connections, the layout can be changed suit to the site conditions.

Note 2:

In case that effluent must be lifted, please replace the sampling chamber with a pumping station.

Series 32 p.e.
outlet by gravity

www.clearfox.com

Small wwtp
ClearFox- nature 32p.e.



Copyright at PPU - Umwelttechnik - Germany

Datum: 22.09.2016

DIN A4

M1:60

gez.: mz